

# Specifications



## CPU AND MEMORY

- CPU : 32-bit CPU
- MEMORY : 8MB SDRAM, 4MB Flash ROM  
Flash ROM expandable to 8MB

## PRINT

- RESOLUTION : T4e 203 dpi/T43e 300 dpi
- PRINT MODE : Direct Thermal/Thermal Transfer
- PRINT SPEED : 203 dpi 1 to 4 ips/300 dpi 1 to 3 ips
- MAX. PRINT LENGTH : 150 inches
- PRINT WIDTH : 4.1" (104mm)
- BARCODE :
  - 1D : Code39, Code93, Code128 UCC, Code128 auto, Codabar, EAN8, EAN13, Interleaved 2 of 5, UCC/EAN 128, UPC A, UPC E, UPC Interleaved 2 of 5, Code11
  - 2D : Data Matrix, MaxiCode, PDF417, QR code
- FONT :
  - 5 internal expandable bitmap fonts (alpha-numeric)
  - 2 internal expandable bitmap fonts (numeric only)
  - Downloadable soft font
  - 4 directions : 0, 90, 180, 270 degrees
- IMAGE : PCX, Direct binary graphic

**SENSOR TYPE** : Moveable reflective sensor, Cover open sensor, ribbon sensor

**CONTROL PANEL** : 4 function keys, 4 status LED light, 1 error LED light

## MEDIA

- WIDTH : 0.59"~4.33"(15mm~110mm)
- MEDIA ROLL DIAMETER : ID-1" (25.4mm)/OD-Max. 5"(127mm)
- MEDIA THICKNESS : 0.002" (0.06mm) to 0.0075" (0.2mm)
- MEDIA TYPE : Continuous, die-cut, tag, fan-fold, black mark

## RIBBON

- WIDTH : 1.0" (25.4mm) to 4.3" (110mm)
- RIBBON ROLL DIAMETER : ID- 0.5"/OD-1.535"
- RIBBON LENGTH : Max. length-100M
- RIBBON TYPE : Wax, wax/resin, resin

**INTERFACE** : Serial, USB master and slave, Ethernet 10/100Mbps (option)

**POWER** : Switching power adapter- Input : 100 to 240V/Output : 24V

**OPTION** : T4e Peeler kit, T4e Cutter, Ethernet module, Stacker

**OPERATING TEMPERATURE** : 5°C to 45°C(40°F to 112.9°F)

**PRINTER DIMENSION** : Width : 200(W) x 263(L) x 188(H) mm, Weight : 2KG

**CERTIFICATION** : CE, FCC class B, CCC, CB

## Option


### T4e Cutter



### T4e Peeler



### Ethernet

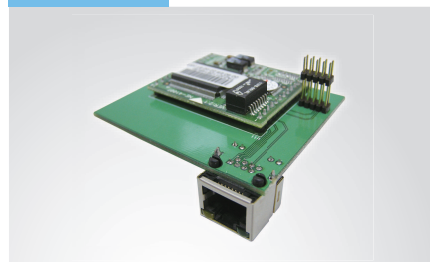

### Stacker



Specifications subject to change without notice. Copyright 2010. Sbarco Technology Co., Ltd.  
All right reserved. SBARCO is a registered trade mark of Sbarco Technology Co., Ltd.

# THE ONE YOU CAN RELY ON

SBARCO Technology Co., Ltd.

Add : 4F., No.115, Lide St., JhongHe Dist., 23556, New Taipei City, Taiwan

Tel : 886-2-3234-3098 Fax : 886-2-3234-1700 Website : [www.sbarcotech.com](http://www.sbarcotech.com)

# SBARCO

THE ONE YOU CAN RELY ON



**T4e**

**Most cost-effective,  
Most desiring printer**  
Well-suited label printer  
for your business

